

Internal gear pump PGH


Fixed displacement

Series 2X

RE 10223

Edition: 04.2013

Replaces: 03.2005

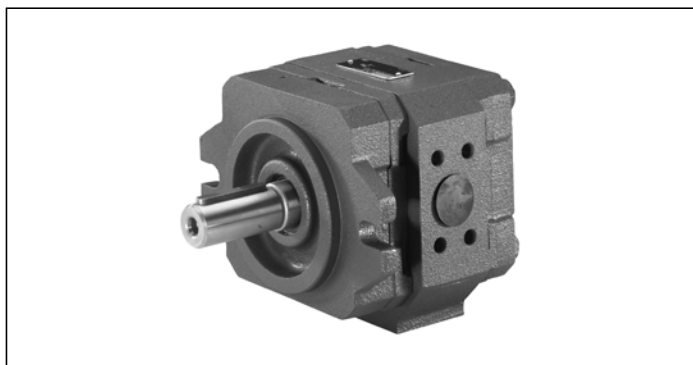

- ▶ Frame sizes 2 and 3
- ▶ Size 5 to 16
- ▶ Maximum pressure 350 bar
- ▶ Displacement 5.2 to 16.0 cm³

Features

- ▶ Fixed displacement
- ▶ Low operating noise
- ▶ Low flow pulsation
- ▶ High efficiency even at low rotational speed and viscosity due to sealing gap compensation
- ▶ Suitable for a wide viscosity and speed range
- ▶ All frame sizes and sizes can be optionally combined with each other
- ▶ Can be combined with internal gear pumps, radial piston pumps and external gear pumps

Contents

| | |
|--|----|
| Ordering code | 2 |
| Functional description | 3 |
| Technical data | 4 |
| Characteristic median values for frame sizes 2 and 3 | 5 |
| Dimensions frame size 2 | 6 |
| Dimensions frame size 3 | 7 |
| Multiple pump units | 9 |
| SAE connection flanges | 12 |
| Pump safety block | 12 |
| Engineering notes | 13 |
| Installation instructions | 14 |
| Commissioning instructions | 15 |

Ordering code

| | | | | | | | | | | |
|-----------|----------|----|-----------|----------|----|----|-----------|----|-----------|----|
| 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 |
| PG | H | | 2X | / | | | 07 | | U2 | |

Type

| | | |
|----|---|-----------|
| 01 | Internal gear pump, fixed displacement, gap compensated | PG |
|----|---|-----------|

Series

| | | |
|----|--|----------|
| 02 | High pressure pump, maximum pressure 350 bar | H |
|----|--|----------|

Frame sizes BG

| | | |
|----|-----|----------|
| 03 | BG2 | 2 |
| | BG3 | 3 |

Unit series

| | | |
|----|---|-----------|
| 04 | Unit series 20 to 29 (20 to 29: unchanged installation and connection dimensions) | 2X |
|----|---|-----------|

Sizes

| | | NG | |
|----|-----|-----------|------------|
| 05 | BG2 | 5 | 005 |
| | | 6 | 006 |
| | | 8 | 008 |
| | BG3 | 11 | 011 |
| | | 13 | 013 |
| | | 16 | 016 |

Directions of rotation

| | | | |
|----|-----------------------|-------------------|----------|
| 06 | Viewed on drive shaft | clockwise | R |
| | | counter-clockwise | L |

Drive shafts

| | | | |
|----|---|---------------------|----------|
| 07 | Parallel keyed shaft, DIN 6885 | | E |
| | Splined shaft to SAE J744 with involute spline to ANSI B92.1a | 16-4 (A) 9T 16/32DP | R |
| | | 19-4 11T 16/32DP | S |

Line ports

| | | |
|----|--|-----------|
| 08 | Suction and pressure port to SAE, pressure port standard pressure series | 07 |
|----|--|-----------|

Seals

| | | |
|----|--|----------|
| 09 | FKM (fluor-caoutchouc) | V |
| | FKM (fluor-caoutchouc), shaft seal in NBR (nitrile-caoutchouc) ¹⁾ | W |

Mounting flange

| | | |
|----|------------|-----------|
| 10 | SAE 2-hole | U2 |
|----|------------|-----------|

| | | |
|----|----------------------------------|--|
| 11 | Further parameters in clear text | |
|----|----------------------------------|--|

Ordering example

PGH3-2X/016RE07VU2


Material number

R900951305

Not all of the variants according to the ordering code are possible! Please select the desired pump with the help of the selection table (page 6 to 8) or after consultation with Bosch Rexroth.

¹⁾ For HFC-fluids

Functional description

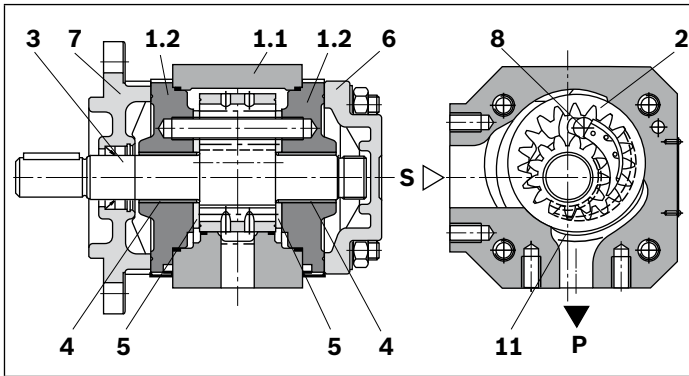

Assembly

PGF hydraulic pumps are leak gap-compensated internal gear pumps with a fixed displacement. They consist basically of housing (1.1), bearing cover (1.2), ring gear (2), pinion shaft (3), slide bearings (4), axial discs (5), end cover (6), mounting flange (7) and stop pin (8), as well as the segment assembly (9), which is composed of a segment (9.1), segment carrier (9.2) and the sealing rolls (9.3).


Suction and displacement process

The hydro dynamically supported pinion shaft (3) drives the internally toothed ring gear (2) in the direction of rotation shown.

During rotation, the volume is increased in the suction area over an angle of approx. 90°. A negative pressure is generated and fluid flows into the chambers.

The sickle-shaped segment assembly (9) separates the suction chamber from the pressure chamber. Within the pressure chamber, the teeth of the pinion shaft (3) mesh with the tooth spaces of the ring gear (2). The fluid is then displaced through the pressure channel (P).


Axial compensation

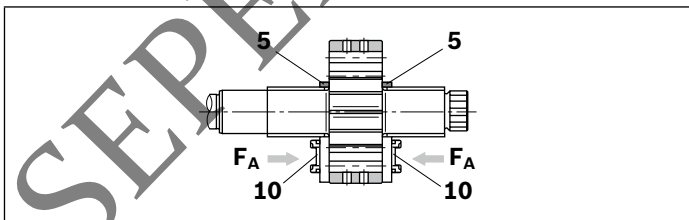

The axial compensation force F_A acts in the area of the pressure chamber and is generated by the pressure zone (10) in the axial discs (5).

The axial, longitudinal gaps between rotating and fixed parts are therefore extremely small and ensure optimum axial sealing of the pressure chamber.

Radial compensation

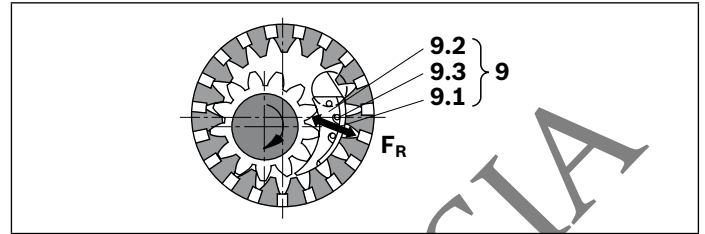

The radial compensation force F_R acts on the segment (9.1) and segment carrier (9.2).

Depending on the operating pressure the two segment assemblies (9.1) and (9.2) are pressed against the pinion shaft-head diameter (3) and the ring gear (2). The area ratios and the position of the sealing rolls (9.3) between the segment and segment carrier are designed to provide virtually gap-free sealing between the ring gear (2), the segment assembly (9) and the pinion shaft (3). Spring elements under the sealing rolls (9.3) ensure adequate contact pressure, even at very low pressures.


Hydrodynamic and hydrostatic bearing

The forces acting on the pinion shaft (3) are absorbed by hydro dynamically lubricated radial slide bearings (4) while those acting on the ring gear (2) are absorbed by the hydrostatic bearing (11).

Splines

Involute splining was selected for the splines. Their long length of contact results in a low flow and pressure pulsation; these low pulsation rates greatly contribute to the low-noise operation.

▼ Symbol



Technical data

| Frame size | | BG | 2 | 2 | 2 | 3 | 3 | 3 | |
|---|-----------------------------|-------------------|--|---|------|------|------|------|------|
| Size | | NG | 5 | 6 | 8 | 11 | 13 | 16 | |
| Displacement, geometric | | V_g | cm ³ | 5.24 | 6.5 | 8.2 | 11.0 | 13.3 | 16.0 |
| Drive speed | | n_{min} | rpm | 600 | 600 | 600 | 600 | 600 | 600 |
| | | n_{max} | rpm | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| Operating pressure, absolute | | | | | | | | | |
| Inlet | | p | bar | 0.8 to 2 (short-term at start 0.6 bar) | | | | | |
| Outlet | continuous | | | | | | | | |
| | Standard fluid | | p_n | bar | 315 | 315 | 315 | 315 | 315 |
| | Special fluid ¹⁾ | | p_n | bar | 210 | 210 | 210 | 210 | 210 |
| | intermittend ²⁾ | | | | | | | | |
| | Standard fluid | | p_{max} | bar | 350 | 350 | 350 | 350 | 350 |
| | Special fluid ¹⁾ | | p_{max} | bar | 230 | 230 | 230 | 230 | 230 |
| Flow (at n = 1450 rpm, p = 10 bar, v = 46 mm ² /s) | | q_v | l/min | 7.5 | 9.3 | 11.8 | 15.8 | 19.1 | 23.0 |
| weight | | m | kg | 4.3 | 4.4 | 4.6 | 4.8 | 5 | 5.3 |
| Shaft loading | | | Radial and axial forces (e. g., belt pulley) only after consultation | | | | | | |
| Type of mounting | | | Flange mounting | | | | | | |
| Hydraulic fluid | | | | | | | | | |
| Standard fluid | | | HLP mineral oil according to DIN 51524 Part 2 | | | | | | |
| Special fluid | | | ► Environmentally acceptable fluids HEES according to DIN ISO 15380 ► Fire resistant anhydrous fluids HFD-U according to VDMA 24317 ► Hydrous polymer-solutions HFC according to DIN EN ISO 12922 ³⁾ ► Observe our application instructions and application requirements in the data sheets 90220 (HLP), 90221 (HEES) and 90222 (HFD-U). ► Other fluids on request! | | | | | | |
| Temperature range | | °C | Standard fluid | -10 to +80, for other temperatures please consult us! | | | | | |
| | | | Special fluid | -10 to +50, for other temperatures please consult us! | | | | | |
| Ambient temperature range | | °C | -20 to +60 | | | | | | |
| Viscosity range | | mm/s ² | 10 to 300; permissible starting viscosity 2000 | | | | | | |
| Maximum permissible degree of contamination of the hydraulic fluid. | | | | Class 20/18/15 ⁴⁾ | | | | | |
| Cleanliness level according to ISO 4406 (c) | | | | | | | | | |


Note

Please contact us if the unit is to be used outside the specified values!


- 1) For special fluids observe restrictions of the technical data!
- 2) Maximum 10 s, at most 50 % of the duty cycle
- 3) Execution of seals W
- 4) Cleanliness levels specified for the components must be maintained in the hydraulic systems. Effective filtration prevents malfunctions and simultaneously extends the service life of the components.
For the selection of the filters see data sheets 50070, 50076, 50081, 50086, 50087 and 50088.

Characteristic median values for frame sizes 2 and 3


▼ Flow

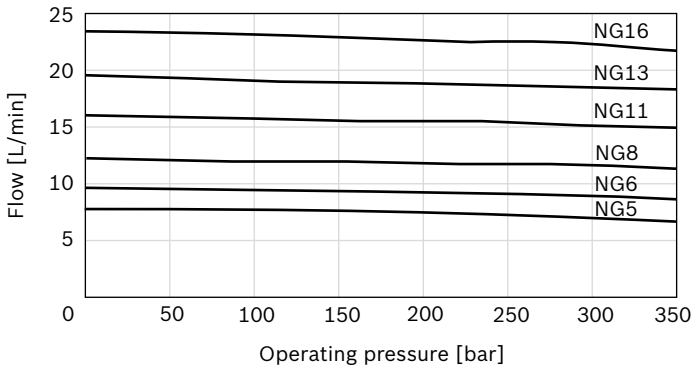

▼ Sound pressure level

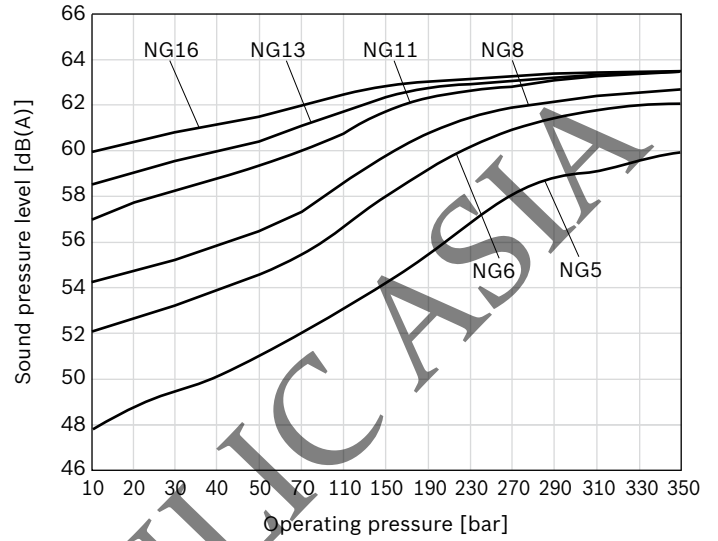


▼ Efficiency

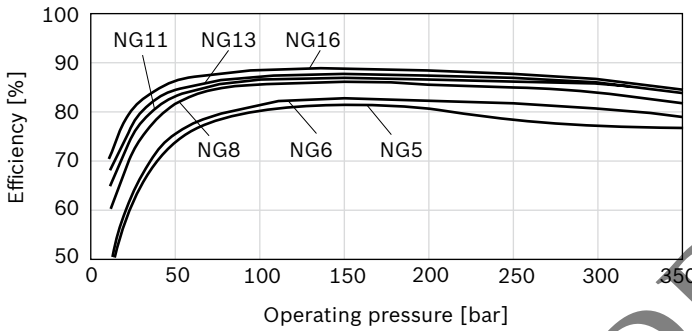

Note


- Characteristics measured at $n = 1450$ rpm;
 $\nu = 41 \text{ mm}^2/\text{s}$; $\theta = 50 \text{ }^\circ\text{C}$
- Sound pressure level measured in acoustic room according to DIN 45635, page 26;
distance sound sensor – pump = 1 m

▼ Drive power

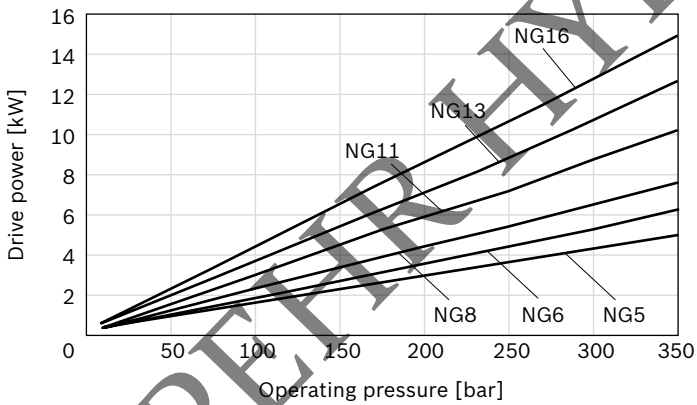


Dimensions frame size 2

With parallel keyed shaft or splined shaft SAE J744 and SAE-mounting flange 82-2

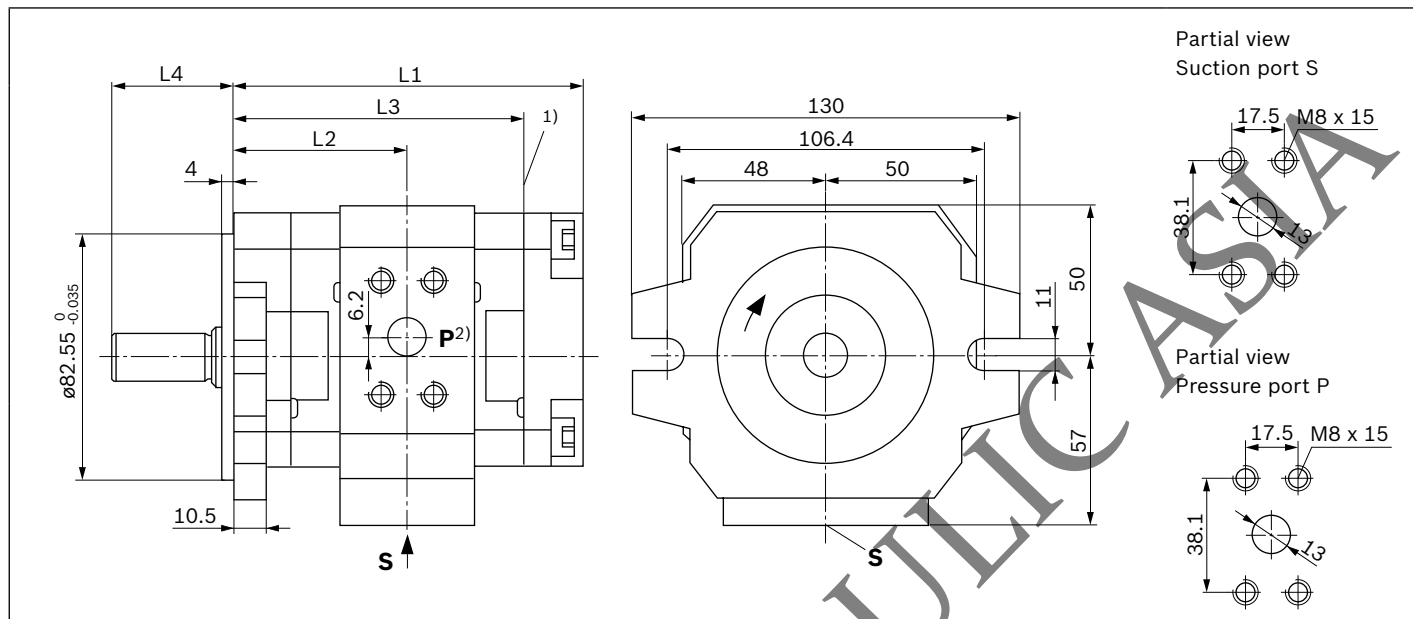


| Type | Material numbers | L1 | L2 | L3 | L4 | Suction port S ⁴⁾ | Pressure port P ⁴⁾ |
|-------------------------------------|------------------|-------|------|------|------|------------------------------|-------------------------------|
| PGH2-2X/005 R ³⁾ E 07VU2 | R900968999 | 110 | 54.2 | 89.5 | 41 | 1/2 in; 5000 psi | 1/2 in; 5000 psi |
| L | R900703725 | | | | | | |
| R ³⁾ R 07VU2 | R900972378 | | | | 31.5 | | |
| L | R900703727 | | | | | | |
| 006 R ³⁾ E 07VU2 | R900951301 | 112.5 | 55.5 | 92 | 41 | 1/2 in; 5000 psi | 1/2 in; 5000 psi |
| L | R900961547 | | | | | | |
| R ³⁾ R 07VU2 | R900961549 | | | | 31.5 | | |
| L | R900961550 | | | | | | |
| 008 R ³⁾ E 07VU2 | R900951302 | 116 | 57.3 | 95.5 | 41 | 1/2 in; 5000 psi | 1/2 in; 5000 psi |
| L | R900961548 | | | | | | |
| R ³⁾ R 07VU2 | R900961551 | | | | 31.5 | | |
| L | R900961552 | | | | | | |

Parallel keyed shaft DIN 6885

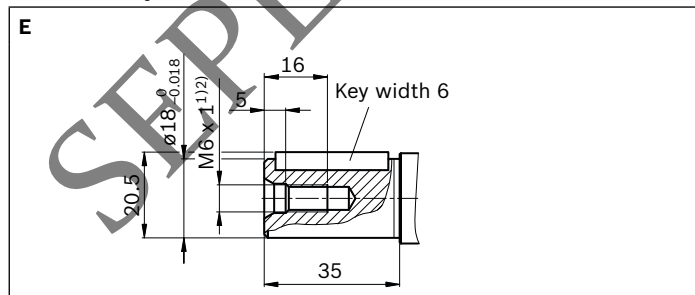


Splined shaft SAE J744

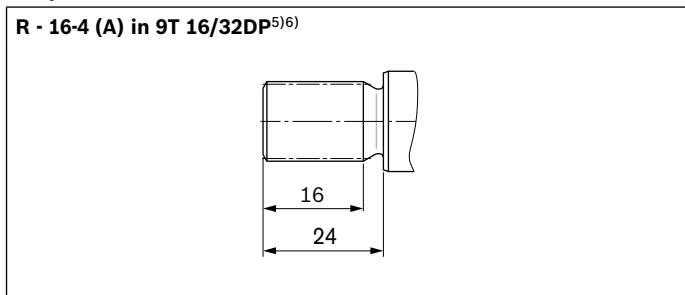


- At multiple pump units the combination part starts here
- Shown are pumps in clockwise rotation, pumps in counter clockwise rotation have the pressure port on the opposite side!
- Preferably available

- Standard pressure range
- In multiple pump units suitable as middle and rear pump
- Involute spline to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

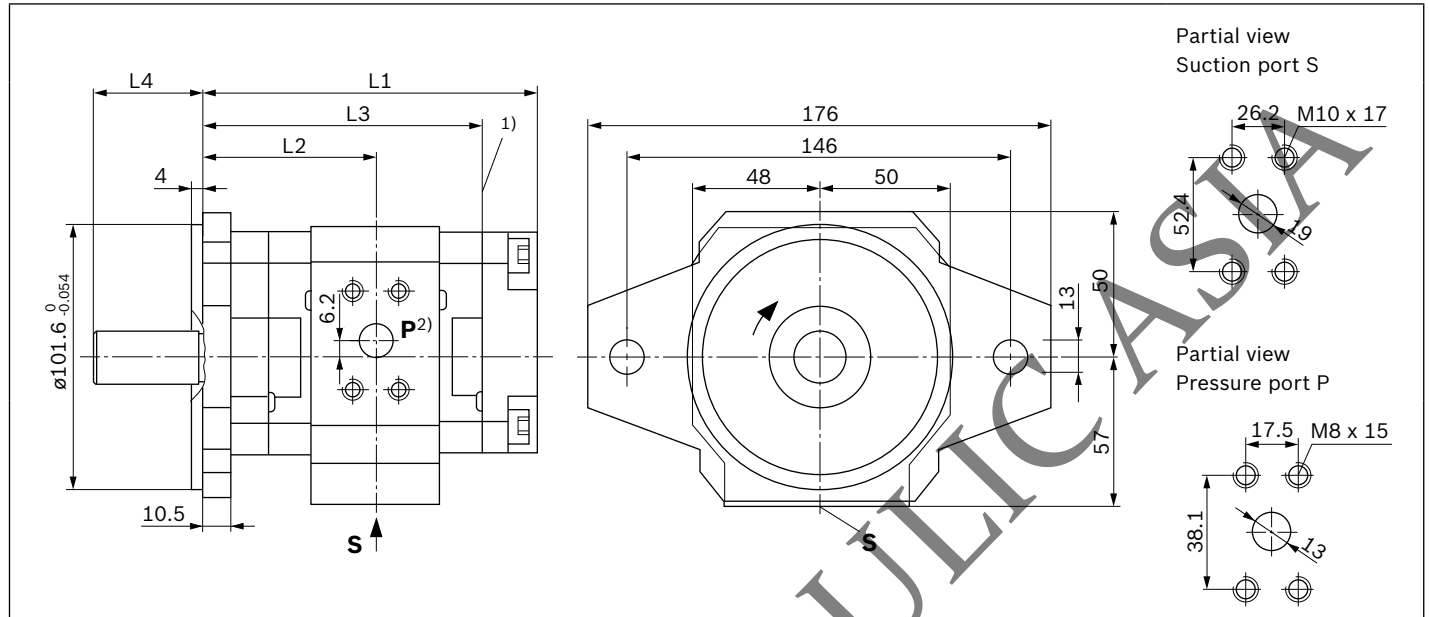
Dimensions frame size 3**With parallel keyed shaft and SAE-mounting flange 101-2**

| Type | Material numbers | L1 | L2 | L3 | L4 | Suction port S ⁴⁾ | Pressure port P ⁴⁾ |
|---|------------------|-----|------|-------|----|------------------------------|-------------------------------|
| PGH3-2X/ 011 R ³⁾ E 07VU2 | R900951303 | 128 | 66.5 | 107.5 | 41 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| L | R900961553 | | | | | | |
| 013 R ³⁾ E 07VU2 | R900951304 | 133 | 69 | 112.5 | 41 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| L | R900961554 | | | | | | |
| 016 R ³⁾ E 07VU2 | R900951305 | 138 | 71.5 | 117.5 | 41 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| L | R900961555 | | | | | | |

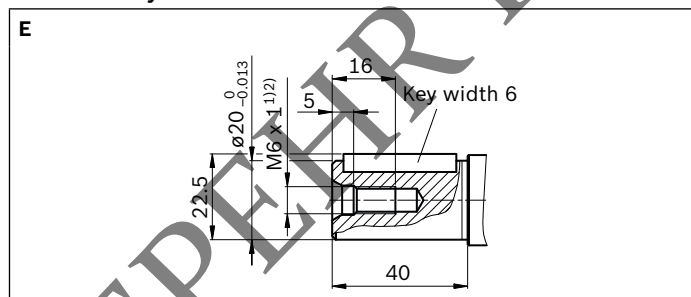▼ Parallel keyed shaft DIN 6885

- At multiple pump units the combination part starts here
- Shown are pumps in clockwise rotation, pumps in counter clockwise rotation have the pressure port on the opposite side!
- Preferably available
- Standard pressure range

With splined shaft SAE J744 and SAE-mounting flange 82-2

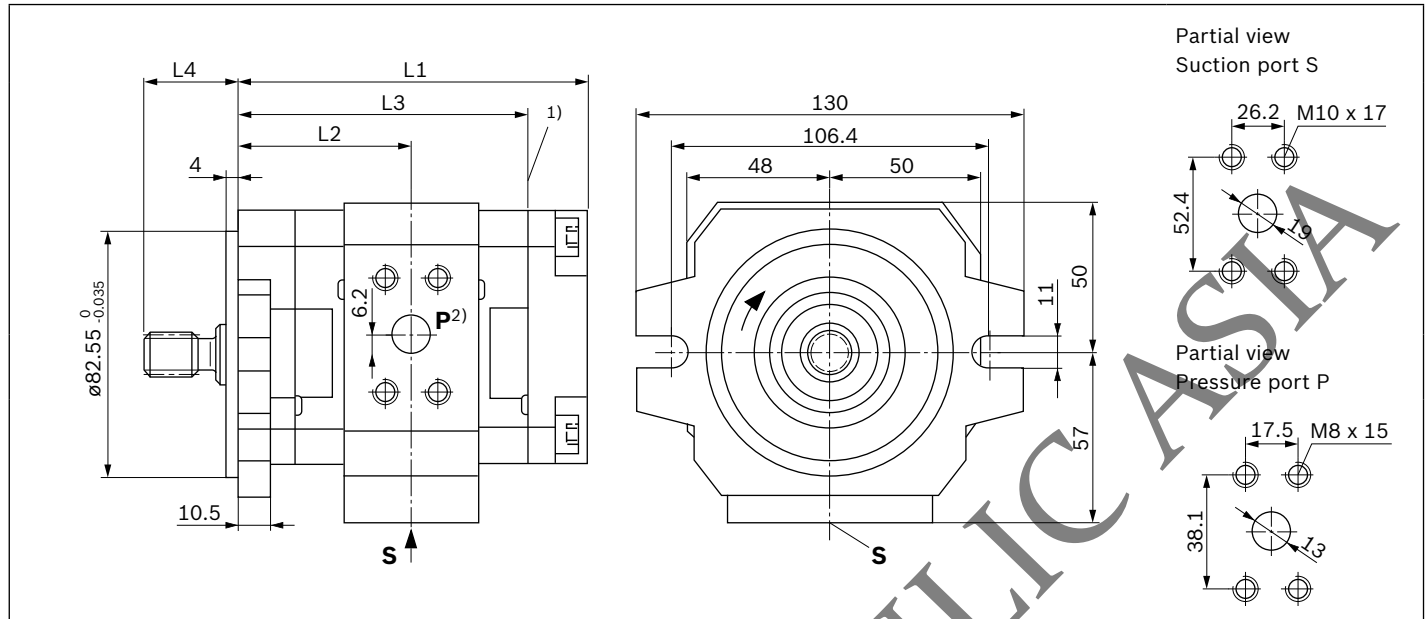

| Type | | Material numbers | L1 | L2 | L3 | L4 | Suction port S ⁴⁾ | Pressure port P ⁴⁾ |
|---------------------|-------------------------|------------------|-------|------|-----|------|------------------------------|-------------------------------|
| PGH3-2X/ 011 | R ³⁾ R 07VU2 | R900961556 | 121.5 | 60 | 101 | 31.5 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| | L | R900961559 | | | | | | |
| | R S 07VU2 | R901267181 | | | | 37 | | |
| 013 | R ³⁾ R 07VU2 | R900961557 | 126.5 | 62.5 | 106 | 31.5 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| | L | R900961560 | | | | | | |
| | R S 07VU2 | R901281697 | | | | 37 | | |
| 016 | R ³⁾ R 07VU2 | R900961558 | 131.5 | 65 | 111 | 31.5 | 1 in; 3000 psi | 1/2 in; 5000 psi |
| | L | R900961561 | | | | | | |
| | R S 07VU2 | R901281698 | | | | 37 | | |

▼ **Splined shaft SAE J744**

| | |
|--|---|
| R - 16-4 (A) in 9T 16/32DP⁵⁾⁶⁾ | S - 19-4 in 11T 16/32DP⁶⁾ |
|--|---|

- At multiple pump units the combination part starts here
- Shown are pumps in clockwise rotation, pumps in counter clockwise rotation have the pressure port on the opposite side!
- Preferably available
- Standard pressure range
- In multiple pump units suitable as middle and rear pump
- Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

Multiple pump units

All internal gear pumps type PGH are combinable, every pump has a through drive connection. The combination options and the material numbers for the necessary combination parts can be taken from the following table.

| Rear pump | Front pump | |
|-------------------|------------|------------|
| | PGH2-2X | PGH3-2X |
| PGH2-2X/...R...U2 | R900886137 | R900886137 |
| PGH3-2X/...R...U2 | R900886137 | R900886137 |
| PGP2-2X/...J...U2 | R900886137 | R900886137 |
| PGF2-2X/...J...U2 | R900886137 | R900886137 |
| AZPF...RR...B | R900886137 | R900886137 |
| PR4-1X...WA | R901015657 | R901015657 |

SEPEHR HYDRAULIC ASIA

10 **PGH Series 2X** | Internal gear pump
Multiple pump units

Ordering code

| | | | | | | | | | | | | | | |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 |
| | | / | + | / | + | / | | | | + | | + | | |

Type

| | | |
|----|--------|----|
| 01 | 2-fold | P2 |
| | 3-fold | P3 |

| | | |
|----|--|--|
| 02 | Series of the first pump ¹⁾ | |
|----|--|--|

| | | |
|----|--------------------------------------|--|
| 03 | Size of the first pump ¹⁾ | |
|----|--------------------------------------|--|

| | | |
|----|---|--|
| 04 | Series of the second pump ¹⁾ | |
|----|---|--|

| | | |
|----|---------------------------------------|--|
| 05 | Size of the second pump ¹⁾ | |
|----|---------------------------------------|--|

| | | |
|----|--|--|
| 06 | Series of the third pump ¹⁾ | |
|----|--|--|

| | | |
|----|--------------------------------------|--|
| 07 | Size of the third pump ¹⁾ | |
|----|--------------------------------------|--|

Direction of rotation

| | | | |
|----|-----------------------|-------------------|---|
| 08 | Viewed on drive shaft | clockwise | R |
| | | counter-clockwise | L |

Drive shaft of the first pump

| | | | |
|----|---|---------------------|---|
| 09 | Parallel keyed shaft, DIN 6885 | | E |
| | Splined shaft to SAE J744 with involute tooth system to ANSI B92.1a | 16-4 (A) 9T 16/32DP | R |
| | | 19-4 11T 16/32DP | S |

Line port of the first pump

| | | |
|----|--|----|
| 10 | Suction and pressure port to SAE, pressure port standard pressure series | 07 |
|----|--|----|

Drive shaft of the second pump²⁾

| | | | |
|----|---|---------------------|---|
| 11 | Parallel keyed shaft, DIN 6885 | | A |
| | Splined shaft to SAE J744 with involute tooth system to ANSI B92.1a | 16-4 (A) 9T 16/32DP | J |
| | | | R |

Line port of the second pump

| | | |
|----|--|----|
| 12 | Suction and pressure port to SAE, pressure port standard pressure series | 07 |
|----|--|----|

Drive shaft of the third pump²⁾

| | | | |
|----|---|---------------------|---|
| 13 | Parallel keyed shaft, DIN 6885 | | A |
| | Splined shaft to SAE J744 with involute tooth system to ANSI B92.1a | 16-4 (A) 9T 16/32DP | J |
| | | | R |

Line port of the third pump

| | | |
|----|--|----|
| 14 | Suction and pressure port to SAE, pressure port standard pressure series | 07 |
|----|--|----|

Mounting flange of the first pump

| | | |
|----|--------------------------|----|
| 15 | SAE 2-hole ²⁾ | U2 |
|----|--------------------------|----|

¹⁾ Detailed information see ordering code page 2



²⁾ See table page 9

Dimensions

The dimensional drawings show the first pump and the combination part.¹⁾


PGH2/PGH3

PGH2 with combination part for PGH2, PGH3, PGF2, PGP2, AZPF

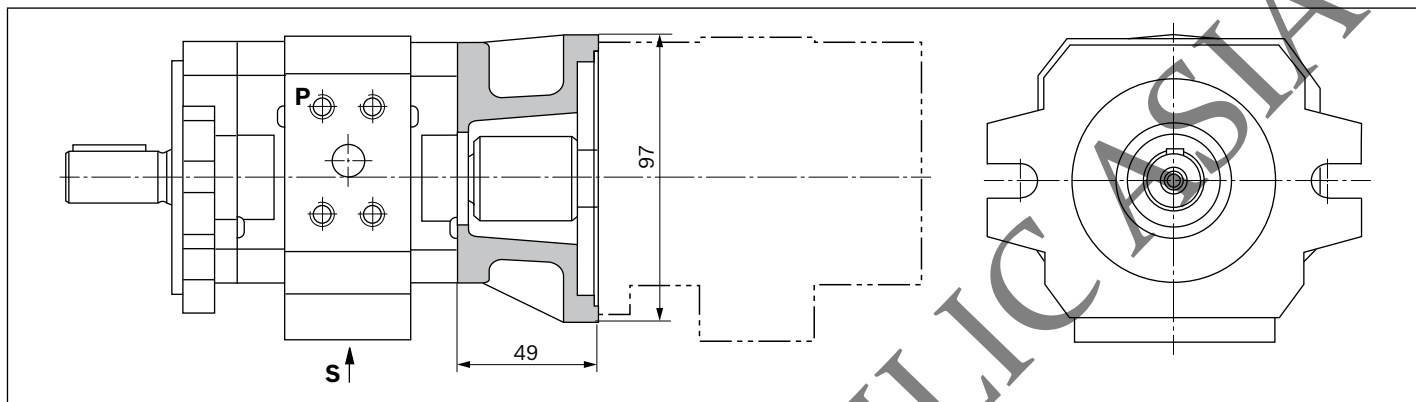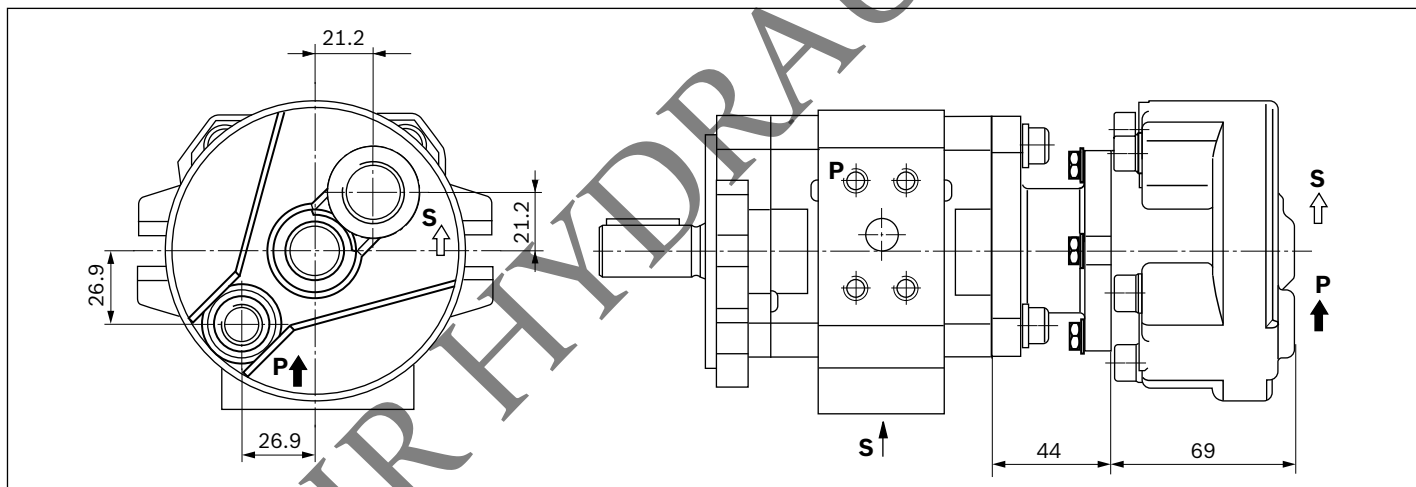**PGH2/PGH3 + R4-Mini**

¹⁾ Dimensions of the single pumps see page 6 to 8 or the relevant data sheets of the rear pump.

SAE connection flanges

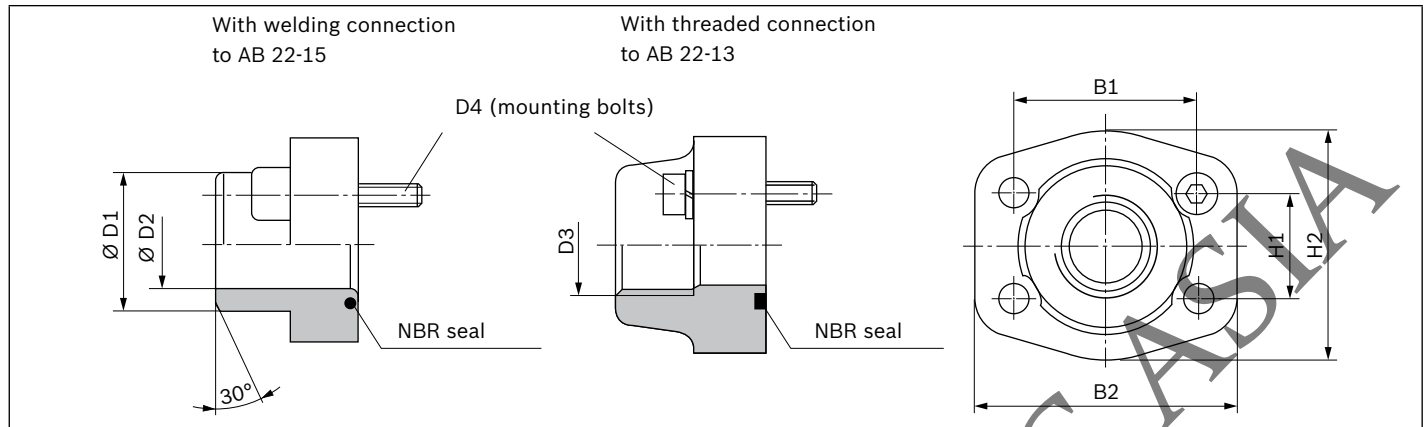

| PGH | | Flange | Material number ¹⁾ for flange with | | Dimensioning | | | | | | | |
|-------------------|--|--------------------|--|--------------------------------------|--------------|----|------|----|----|----|------|----------|
| Suction flange | Pressure flange | NG, pressure | Welding port | Threaded connection ²⁾ | B1 | B2 | H1 | H2 | D1 | D2 | D3 | D4 |
| PGH2/005/ 006/008 | PGH2/005/ 006/008 PGH3/011/ 013/016 | 1/2 in 5000 psi | R900026298 | R900024200 | 38.1 | 54 | 17.5 | 46 | 20 | 14 | G1/2 | M8 x 30 |
| PGH3/011/013/016, | – | 1 in 3000 psi | R900012937 | R900014154 | 52.4 | 70 | 26.2 | 59 | 35 | 27 | G1 | M10 x 35 |

Pump safety block

For limitation of the operating pressure or (and) for solenoid-actuated relief of operating pressure we recommend our pump-pressure-safety-block to data sheets 25880 and 25891.

1) The material numbers comprise the flange, the O-ring (NBR) and the mounting bolts.

2) Pipe thread "G" according to DIN EN ISO 228/1

Engineering notes

Extensive notes and suggestions can be found in the Hydraulic Trainer, volume 3 "Project planning recommendations and design of hydraulic systems".

When using internal gear pumps, provide an additional manual, switchable or automatic air bleeding option. The air bleeding point for manual air bleeding must be provided in the pressure line upstream of the first valve or check valve to ensure air bleeding can be performed depressurized.

Technical data

All mentioned technical data are dependent on manufacturing tolerances and are applicable for certain boundary conditions.

Note that certain deviations are therefore possible and that technical data may vary when boundary conditions (e. g., viscosity) change.

Characteristic curves

When dimensioning the drive motor, observe the maximum possible application data on the basis of the characteristics shown on the page 5.

Sound pressure level

The shown values for the sound pressure level on page 5 were measured in dependence on DIN 45635, sheet 26. This means that only the noise emitted by the pump is shown. Ambient influences (installation site, piping etc.) were not taken into account.

These values always refer to only one pump.

With internal gear pumps, the excitation of valves, pipelines, machine parts, etc. is very low due to the low flow pulsation (approx. 2 to 3 %).

Nevertheless, under unfavorable conditions, the sound pressure level at the installation site of the power unit can be 5 to 10 dB(A) higher than the values of the pump itself.

Multiple pump units

- ▶ The same general technical data apply as for the single pumps (see page 4).
- ▶ Combined pumps must all have the same direction of rotation.
- ▶ The pump with the largest input drive torque should be taken as the first pump.
- ▶ The engineer must verify the maximum through-drive torque for each application. This also applies for existing (coded) multiple pumps.
- ▶ The sum of all input torques in a multiple pump unit may not exceed the permissible input torque of the first pump.
- ▶ Common suction is not possible.
- ▶ Before operating pump combinations with different hydraulic fluids, please contact Bosch Rexroth.
- ▶ The middle and the rear pump must feature the drive shaft execution "R" (stronger spline).
- ▶ The drive torque of a pump stage is calculated as follows:

$$T = \frac{\Delta p \cdot V \cdot 0.0159}{\eta_{\text{hydr-mech}}}$$

Key

| | |
|------------|---------------------------------|
| T | Torque T [Nm] |
| Δp | Operating pressure [bar] |
| V | Displacement [cm ³] |
| η | Hydraulic mechanical efficiency |

▼ Maximum permissible torques [Nm]

| Type | Drive torque | | | Output torque |
|------|------------------|-----------------|-----------------|---------------|
| | Parallel shaft E | Splined shaft R | Splined shaft S | |
| PGH2 | 100 | 80 | 155 | 75 |
| PGH3 | 110 | 80 | 155 | 75 |

Installation instructions


Fluid tank

- ▶ Adjust the usable capacity of the tank to the operating conditions.
- ▶ The permissible fluid temperature must not be exceeded; provide a cooler if necessary.

Lines and ports

- ▶ Remove protective plug from the pump.
- ▶ Select the clear width of pipes according to the ports (suction speed 1 to 1.5 m/s).
- ▶ Inlet pressure see page 4
- ▶ Thoroughly clean pipelines and fittings prior to installing.

Proposal for piping layout

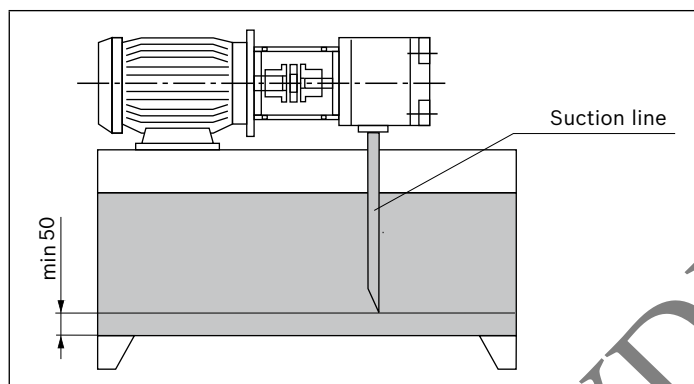

- ▶ Under no circumstances may returning fluid be drawn directly into the suction port again, i. e., select the largest possible distance between suction line and return line.
- ▶ The suction line and return tank line must always be clearly below the oil level.
- ▶ Ensure suction-tight installation of the pipelines.

Filter


If possible, use return-line filter or pressure filters.
(Only use suction filters in combination with a low pressure switch/ contamination indicator).

Hydraulic fluid


- ▶ Please observe our specification according to data sheet 90220.
- ▶ We recommend brand name hydraulic fluids.
- ▶ Different oil types must not be mixed together as this may result in decomposition and deterioration of the lubricity.
- ▶ The fluid must be changed at certain intervals depending on the operating conditions. This involves cleaning residues from the fluid reservoir.

Drive


Electric motor + pump support + coupling + pump

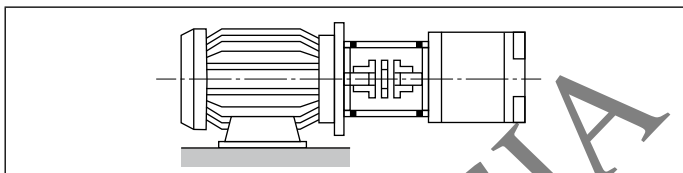

- ▶ No radial or axial forces permissible on the pump drive shaft!
- ▶ Motor and pump must be exactly aligned!
- ▶ Always use a coupling that is suitable for compensating shaft offsets!
- ▶ When installing the coupling, avoid axial forces, i. e. **do not hammer or press the coupling onto the shaft!** Use the female thread of the drive shaft!



Installation positions

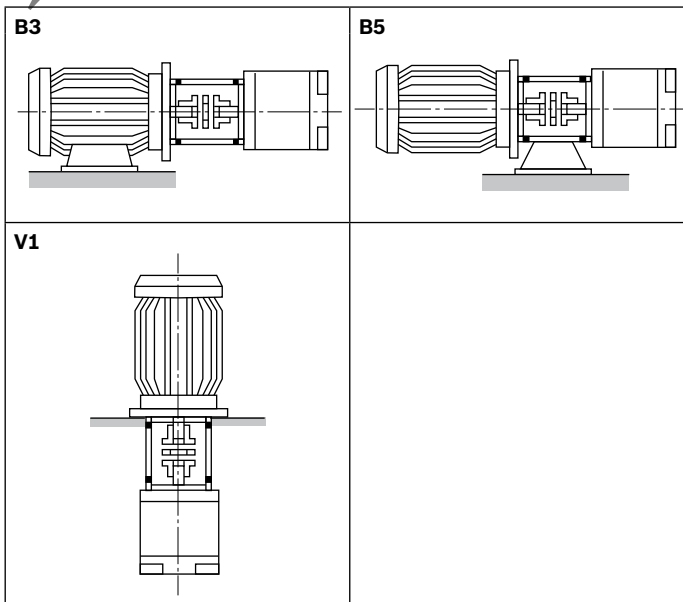

Commissioning instructions

Preparation

- ▶ Check whether the system is thoroughly and properly installed.
- ▶ Fill the hydraulic fluid only in through filters with the required minimum retention rate.
- ▶ Fill pump completely with fluid through suction and pressure line.
- ▶ Check the direction of rotation of the motor for compliance with the direction of rotation according to the pump type.

Air bleed

- ▶ Open the air bleeding port on the system by hand or change over to depressurized circulation in accordance with the instruction manual of the system. During air bleeding, the discharge of entrapped air must be ensured.
- ▶ To air bleed the pump, briefly switch the motor on and then switch it immediately off again (inching mode). Repeat this process until it is ensured that the pump has been completely air bled.
- ▶ Close the open air bleeding ports by hand.

Commissioning

- ▶ Once it is ensured that the pump has been completely air bled, switch on the motor. Let the pump run depressurized until the system is completely air bled. For air bleeding the system, observe the instruction manual for the system.
- ▶ Commission the system according to the instruction manual and let the pump run under load.
- ▶ After some time in operation, check the hydraulic fluid in the reservoir for bladders or the formation of foam on the surface.

Operation

- ▶ During operation, take note of changes in the noise emissions. A slight increase in the noise level is normal due to heating the operating medium. A significant increase in the noise level or brief, stochastic changes in the noise characteristics may indicate the aspiration of air. If suction lines are too short or fluid level not high enough air can also be primed in a swirl action.
- ▶ Changes in operating speeds, temperatures, increase in the noise level or power consumption indicate wear or damage to the system or pump.

Recommissioning

- ▶ Inspect the pump and system for leakage. Loss of oil indicates leakage below the hydraulic fluid level. An increased hydraulic fluid level in the reservoir indicates leakage above the hydraulic fluid level.
- ▶ If the pump is arranged above the hydraulic fluid level, the pump can drain due to leakages, for example due to a worn-out shaft seal ring. In this case, air bleeding is again required during recommissioning. Have the damage repaired.
- ▶ Air bleeding must again be performed following repair and maintenance work.
- ▶ Switch on the motor when the system is in flawless condition.

General

- ▶ Pumps delivered by us are tested for function and power. The warranty applies only to the delivered configuration.
- ▶ Repairs may only be performed by the manufacturer or his authorized dealers and subsidiaries. The entitlement to warranty cover will be rendered void if the product is incorrectly repaired, installed, commissioned or operated, or if it is used or handled improperly.
- ▶ Through opening, conversion or extension of the internal gear pump, the entitlement under warranty will be rendered void.

Notes

- ▶ Installation, maintenance and repair of the pump may only be carried out by authorized, trained and instructed personnel!
- ▶ The pump may only be operated at the permissible data (see pages 4).
- ▶ The pump may only be operated when in perfect condition!
- ▶ During all work on the pump, depressurize the system!
- ▶ Unauthorized conversions or changes that affect safety and function are not permissible!
- ▶ Mount safety devices (e.g., coupling protection) and do not remove any existing safety devices and equipment!
- ▶ Always ensure the proper fit of all mounting bolts! (Observe the specified tightening torques)
- ▶ The generally valid safety and accident prevention regulations must be observed!

SEPEHR HYDRAULIC ASIA

Bosch Rexroth AG
Mobile Applications
Zum Eisengießer 1
97816 Lohr am Main, Germany
Tel. +49 9352 18-0
info.ma@boschrexroth.de
www.boschrexroth.com

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.